



THREE-WAY BALL VALVE

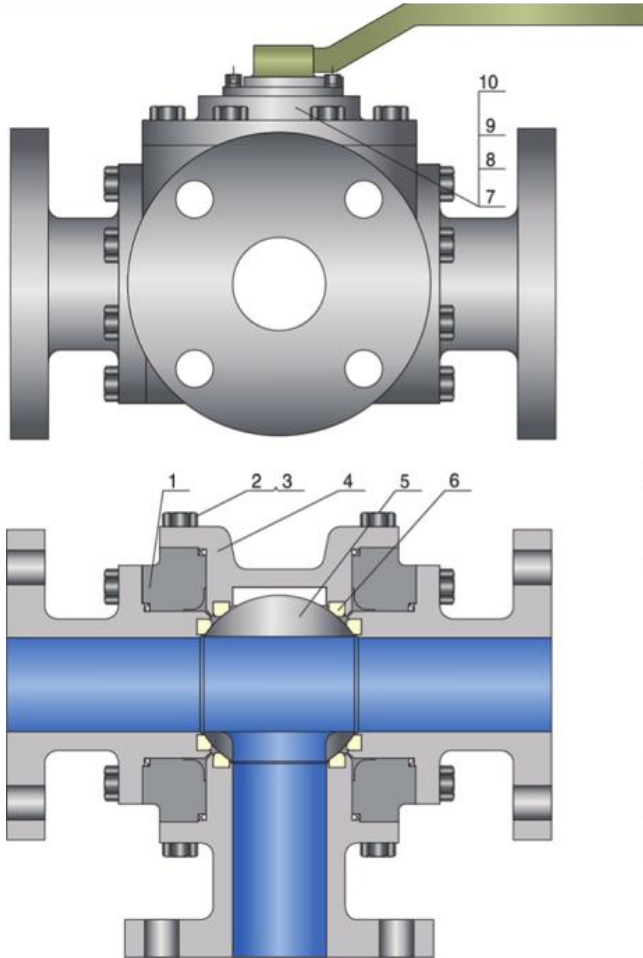

FLOW COMBINATIONS CHART

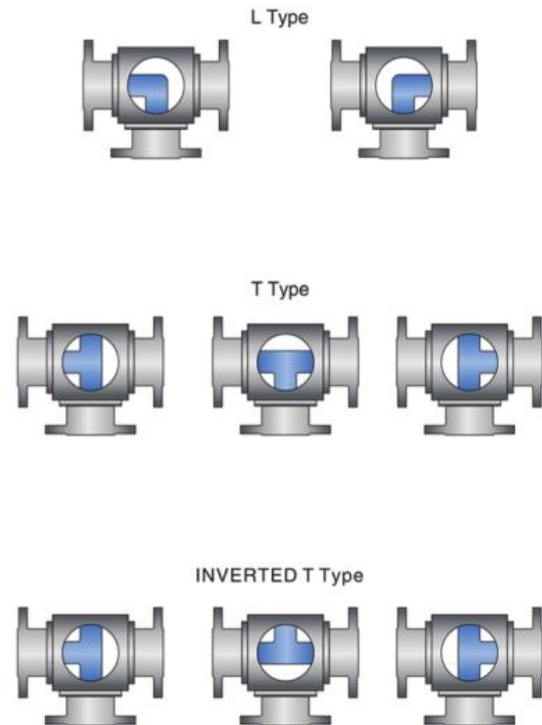

NO.	PART NAME	SAMPLE MATERIALS		
		CARBON STEEL	ALLOY STEEL	STAINLESS STEEL
1	BODY	ASTM A216 WCB/A105	ASTM A217 WC6/A182 F11	ASTM A351 CF8/A182 F304
2	BONNET BOLT	ASTM A193 B7	ASTM A193 B16	ASTM A193 B8
3	BONNET NUT	ASTM A194 2H	ASTM A194 4	ASTM A194 8
4	BONNET	ASTM A216 WCB/A105	ASTM A217 WC6/A182 F11	ASTM A351 CF8/A182 F304
5	BALL	A105+ENP/A182 F6a/F304/F316/F51		ASTM A182 F304/F316/F51
6	SEAT	PTFE/RPTFE/NYLON/DEVLON/PEEK		
7	STEM	ASTM A182 F6a/F304/F316/F51		ASTM A182 F304/F316
8	THRUST WASHER		PTFE/RPTFE	
9	STEM PACKING	GRAPHITE	GRAPHITE	GRAPHITE
10	LEVER	CARBON STEEL	CARBON STEEL	CARBON STEEL

NOTE: Metal-to-metal seated ball valve designs are available upon request.

The material is according to ASTM Standard

Model Denote:EFC=Elite Flow Control | 02=Size in inch | BV=Ball Valve | 1=150Lb | R=RF End | 8=Three-Way